

Rear Wheel Removal



1, Loosen the two bolts on the side of the tires to release the back wheel.



2, Remove the washer and push the bolt to the other side until it comes out.




3, Loosen the top of the brake pad and remove the screw until the tire comes off. Slowly put away the chain and the brakes will hang by themselves.



4, Loosen the top bolt to release the cable.




5, Put the cable and the spring back in. Adjust the screw in the nut and make sure to perfectly get it inside the hole. Retighten the bolt with a wrench.

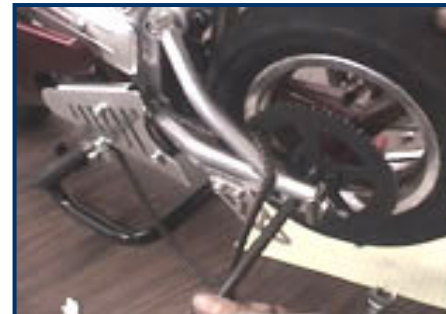

6, Put the tire back on and screw the washers, it will support and center the tire.



7, Place the brake pad and slide it on the disk. Screw the bolts on both sides to adjust the brakes.

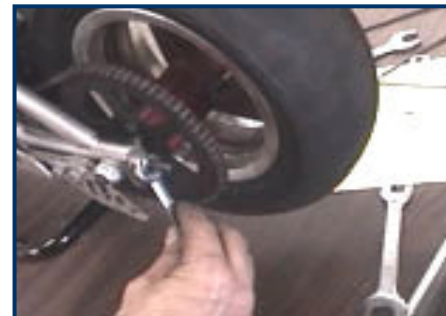

8, Put the chains back on and slowly push the tire back and take to place and tighten the bottom bolt to get better friction against the chain.